



LEDNEON FLEX SPECIFICATION

ITEM NO.	LENGTH IN ROLL	DIMENSION	LED SPACING	TOTAL NO. OF LED	TOTAL WATTS
LN-FX-10-240V	9.1m	14X27.5MM	0.5"	720	43.2W
	10.0m			792	66W
LN-FX-50-240V	48.8m	14X27.5MM	0.5"	3840	230.4W
	49.4m			3888	324W
LN-FX-30-120V	30FT	14X27.5MM	0.5"	720	43.2W
				720	60W
LN-FX-150-120V	150FT	14X27.5MM	0.5"	3600	216W
				3600	300W
LN-FX-30-24V	30FT	14X27.5MM	0.5"	720	64.8W
				720	72W


ITEM NO.	NO.OF LED PER UNIT	CUTTING UNIT	WATTS PER METER OR FOOT	LED COLOR	MAX. LOADING LENGTH
LN-FX-10-240V	120	1.52M	4.7W/M	R,Y,O	58M (With 1.6A converter)
	72	0.91M	6.6W/M	G,B,W	
LN-FX-50-240V	120	1.52M	4.7W/M	R,Y,O	146M (With 4A converter)
	72	0.91M	6.6W/M	G,B,W	
LN-FX-30-120V	60	2.5FT	1.44W/FT	R,Y,O	96FT (With 1.6A converter) 240FT (With 4A converter)
	36	1.5FT	2W/FT	G,B,W	
LN-FX-150-120V	60	2.5FT	1.44W/FT	R,Y,O	96FT (With 1.6A converter) 240FT (With 4A converter)
	36	1.5FT	2W/FT	G,B,W	
LN-FX-30-24V	8	1/3FT	2.16W/FT	R,Y,O	16FT (With 1.6A converter)
	6	1/4FT	2.4W/FT	G,B,W	40FT (With 4A converter)

Recommended storage & operating temperature: -20°C to 60°C, 100% humidity.

Installing Mode:

The LEDNEON-FLEX is a versatile and user-friendly lighting device. It can be cut, bent and easily installed on the flat surface of various materials, such as wood, plastic, steel, or wall, etc. to form all kinds of pattern according to your design. And it can be easily connected to the power supply and then perform well.

1. It is recommended to mark centerlines or draw the outline of your pattern on the surface of your desired positions.
2. Secure mounting clips along the centerlines at appropriate intervals with screws. If there are curves, it is better to secure a mounting clip on and between each curve.
3. Insert the light body into the mounting clips with the lighting parts upward.
4. Connect each part together.

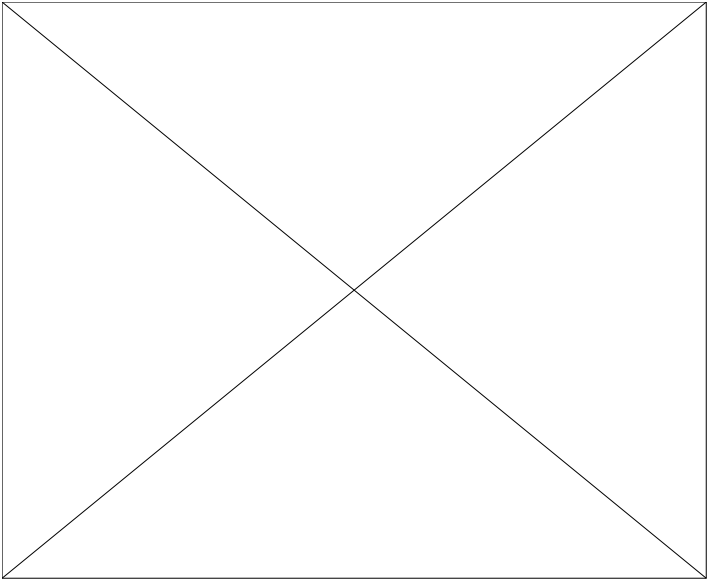

LED Showroom

1. Cutting mark



LN-FX Must be cut only on the indicated mark

2. Linear installation



Includes:
Channel LN-FX-CH

3. Curve installation



Includes:
1. Mini channel LN-FX-5
2. Screw

4. 90° Installation



Includes:
1. Mini channel LN-FX-5
2. Screw

5. 180° Installation



Includes:
1. Mini channel LN-FX-5
2. Screw

6. Convex installation



Includes:
Mini channel LN-FX-5

7. Concave installation



Includes:
Mini channel LN-FX-5

8. Installation with the slot



Press LN-FX into the slot of the installation

